



COLOURS

AG Paving Blocks

# Setts

traditional rumbled paving blocks

## DEPTHS



**50+60**  
Millimetres

## FINISH

**Rm**

Rumbled



110 x  
75mm



90 x  
75mm



75 x  
75mm




50 x  
75mm

Setts  
colours

## COLOURS



CASHEL

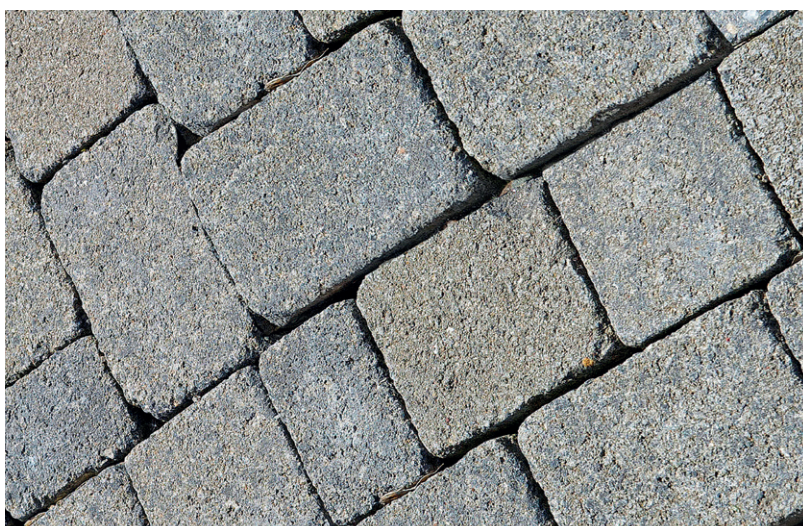

SLATE



Frost  
Resistant



Pedestrian  
Use



Light  
Traffic



Trolley  
Friendly



SPECIFICATION REFERENCE: NBS PLUS: Q24 110 SLAB/BRICK/SETT/COBBLE PAVINGS: 31, 315 BS EN: 1339:2003



T 028 8778 4208 | GB Sales T 0121 747 0202 | E [specifications@ag.uk.com](mailto:specifications@ag.uk.com)

**AG.UK.COM**





# Setts

traditional rumbled paving blocks

DEPTHS



50+60  
Millimetres











FINISH



Rumbled



## STOCK INFORMATION

Standard Product Depth	Size (mm)	In Stock	Available Colours	m² per pack	Units per m²	Units per pack	Unit weight (kg)	Weight per pack (t)	Packs per 8 wheeler	Packs per unit lorry
50mm 	 110 x 75	Yes	Cashel Rumbled / Slate Rumbled	10.5	N/A	1750 (approx. equal quantities of each size)	0.425	1.22	14	22
	 90 x 75						0.625			
	 75 x 75						0.780			
	 50 x 75						0.940			
mixed 4 size tote bag										
60mm 	 110 x 75	Yes	Cashel Rumbled / Slate Rumbled	10.4	N/A	1750 (approx. equal quantities of each size)	0.510	1.32	14	22
	 90 x 75						0.750			
	 75 x 75						0.936			
	 50 x 75						1.128			
mixed 4 size tote bag										

SPECIFICATION REFERENCE: NBS PLUS: Q24 110 SLAB/BRICK/SETT/COBBLE PAVINGS: 31, 315 BS EN: 1339:2003



Frost Resistant



Pedestrian Use



Light Traffic



Trolley Friendly



# Setts

traditional rumbled paving blocks

## DEPTHS



**50+60**  
Millimetres

## FINISH



Rumbled

110 x 75mm	90 x 75mm	75 x 75mm	50 x 75mm
---------------	--------------	--------------	--------------

## STANDARDS + PERFORMANCE

Product Type	Traditional Rumbled Block Paving
Manufactured to	BS EN 1338:2003
Surface Layer	Durable, hard wearing with easy maintenance – > 350kg/m <sup>3</sup>
Efflorescence	Reduced risk due to minimum 12 hour vapour curing
Bending Strength	3.6Mpa
Slip / Skid Risk	Extremely Low (>75 USRV)
Installed to	BS 7533-4:2006
NBS Plus	Q24 110

## MANUFACTURING

Setts are manufactured from high grade locally sourced aggregates. Its colour blends are obtained by using the latest computerised mixing systems. PLANT OF MANUFACTURE (POM): Made at our Fivemiletown production plant.

## CERTIFICATION

ISO 14001	Environmental Management.
ISO 9001	Quality Management.
OSHAS 18001	Occupational Health and Safety Management.
CE Marking	Download our Declaration of Performance (DOP) data at: <a href="http://www.ag.uk.com/cemarking">www.ag.uk.com/cemarking</a>

## EDGES

Setts Supplied with a rumbled edge as standard.



Rumbled

## FINISHES

Setts are made with a colourfast, all-through mix of UV resistant pigments for vibrant, durable, lasting colours. It is rumbled with traditional methods to honour the authentic old cobble effect.



Frost  
Resistant



Pedestrian  
Use



Light  
Traffic



Trolley  
Friendly

SPECIFICATION REFERENCE: NBS PLUS: Q24 110 SLAB/BRICK/SETT/COBBLE PAVINGS: 31, 315 BS EN: 1339:2003

## SUSTAINABILITY

Energy Use	100% renewable
Water Used	100% rain water harvesting
Recyclable	100% of this product can be recycled
Manufacturing	Produced in the UK from locally sourced materials
Non-Primary materials	61 – 70% non primary
Waste Wood + Plastic:	100% recycled
Carbon Footprint	12.3 Kg CO <sub>2</sub> / m <sup>2</sup>
Carbon Reduction	26 Kg CO <sub>2</sub> / m <sup>2</sup>
BREEAM	'A' Rating – in accordance with the BRE Green Guide to Specification. (A+ Rating – when used with recycled sub-base).

